Model Specification for 540i Sedan

5.1 (A)

0.26 (A)

- (A)

- (A)

Out of Town (I/100km)

CO2 Emissions (g/km)

Combined (I/100km)

Tank Capacity (I)

Engine	
Cylinders/Valves	6/4 (A)
Capacity (cc)	2998 (A)
Stroke/Bore (mm)	94.6/82 (A)
Rated Power/Rated	250/5500 -
Engine Speed (kW/rpm)	6500 (A)
Max Torque/Engine	450/1380 - 5200 (A)
Speed (Nm/rpm)	
Combined System	
Torque (Nm)	
Compression Ratio (:1)	11 (A)
Engine type	B58B30O0 (A)

Performance

5th gear

Top Speed (km/h)

Drag Coefficient (c)

Acceleration 0-100km/h (s)

Standing Start 0-1000m (s)

Acceleration 80-120km/h

with manual transmission in

	Dimensions / weights		Weight
6/4 (A)	Luggage Compartment	530 (A)	Axle load ratio (un
2998 (A)	capacity (I)		DIN) %
.6/82 (A)	Ground Clearance (mm)	144 (A)	Unladen (Din Unla
0/5500 -	Wheelbase (mm)	2975 (A)	Gross Vehicle Mas
6500 (A)	Vehicle Length (mm)	4936 (A)	(kg)
5200 (A)	Vehicle Width (mm)	1868 (A)	Permitted Roof Lo
	Vehicle Height (mm)	1479 (A)	Permitted Trailer L
	Track, Front (mm)	1605 (A)	(Braked) (kg)
	Track, Rear (mm)	1630 (A)	Permitted Trailer L
11 (A)	Rear overhang	1099 (A)	(Unbraked) (kg)
3000 (A)	Front disk brakes	V (A)	Permitted Towbar
	V=ventilated		Download (kg)
	Rear disk brakes	V (A)	Permitted Axle Lo
	V=ventilated		rear (kg)
	Turning Circle (m)	12.05 (A)	Permitted Load (k
			Gross Combinatio
			GCM (kg)
			Tare (kg)
	Fuel Consumption		Wheels
250 (A)	In Town (I/100km)	9.3 (A)	Tyre Dimensions

5.9 (A)

7.2 (A)

164 (A)

68 (A)

Wheel Dimensions


Material


	<u>Weight</u>	
(A)	Axle load ratio (unloaded	48 (A)
	DIN) %	
(A)	Unladen (Din Unladen) (kg)	1595 (A)
(A)	Gross Vehicle Mass (GVM)	2270 (A)
(A)	(kg)	
	Permitted Roof Load (kg)	100 (A)
(A)	Permitted Trailer Load	2000 (A)
(A)	(Braked) (kg)	
(A)	Permitted Trailer Load	750 (A)
(A)	(Unbraked) (kg)	
(A)	Permitted Towbar	90 (A)
	Download (kg)	
(A)	Permitted Axle Load front/	1110/1260 (A)
	rear (kg)	
(A)	Permitted Load (kg)	675 (A)
<u></u>	Gross Combination Mass	4360 (A)
	GCM (kg)	
	Tare (kg)	1550 (A)
	Wheels	
	WIICEIJ	

245/45 R18 (A)

Light Alloy (A)

8Jx18 (A)

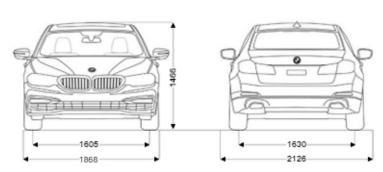

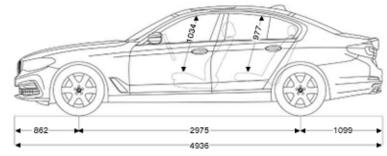

*The published fuel consumption and CO2 emission figures are established according to legislated technical specifications (UNECE Regulation 101/UN Regulation 83 and SANS 20101 standards), which sets out the procedures that are used to measure the CO2 emissions and fuel consumption. The claimed figures are established using specific tests under standardised, carefully controlled conditions and may differ from consumption achieved under real world conditions with the influences of altitude, road surface, geographic conditions, vehicle options, temperature, humidity, tyres size and driving behaviour amongst others.

EU Unladen mass refers to a vehicle with standard equipment, with 90% fuel tank fill, including a driver (68 kg) and luggage (7 kg). Optional extras and accessories will generally increase this figure.

Please contact your preferred authorized BMW dealer or BMW South Africa (Pty) Ltd. for information on vehicles that are available for sale, and the various specifications and options of vehicles that are available.

Trailer loads may not exceed the load stated for un-braked or for braked trailer and the max tow bar load may not exceed the value stated.

Vehicle heights are measured without the aerial. The heights are slightly higher if measured over the aerial. Measurements are stated for vehicles with standard fittings and may vary when optional equipment is fitted.

The technical data stated refers to the current version of the model selected. Due to certain legal regulations in different countries, deviations in the technical data described here can occur.

