Model Specification for 125i Coupé

<u>Engine</u>	
Cylinders/Valves	6/4
Capacity (cc)	2996
Stroke/Bore (mm)	88.0/85.0
Rated Power/Rated	160/6100
Engine Speed (kW/rpm)	
Max Torque/Engine	270/2500 - 4250
Speed (Nm/rpm)	
Combined System	
Torque (Nm)	
Compression Ratio (:1)	10.7
Engine type	N52B30U1

Performance

Top Speed (km/h)

Drag Coefficient (c)

5th gear

Acceleration 0-100km/h (s)

Standing Start 0-1000m (s)

Acceleration 80-120km/h

with manual transmission in

	Dimensions / weights	
6/4	Luggage Compartment	370
996	capacity (I)	
5.0	Ground Clearance (mm)	147
00	Wheelbase (mm)	2660
	Vehicle Length (mm)	4360
250	Vehicle Width (mm)	1748
	Vehicle Height (mm)	1423
	Track, Front (mm)	1474
	Track, Rear (mm)	1507
0.7	Rear overhang	949
U1	Front disk brakes	V 300 / 24
	V=ventilated	
	Rear disk brakes	D 300 / 20
	V=ventilated	
	Turning Circle (m)	10.7

Fuel Consumption

Out of Town (I/100km)

Combined (I/100km)

Tank Capacity (I)

CO2 Emissions (g/km)

In Town (I/100km)

245 (M)

243 (A)

6.4 (M)

26.5 (M)

27.1 (A)

6.8 (M)

7 (A)

0.31

- (A)

<u>Weight</u>	
Axle load ratio (unloaded	48.7 (M)
DIN) %	48.1 (A)
Unladen (Din Unladen) (kg)	1375 (M)
	1395 (A)
Gross Vehicle Mass (GVM)	1815 (M)
(kg)	1835 (A)
Permitted Roof Load (kg)	75
Permitted Trailer Load	1200
(Braked) (kg)	
Permitted Trailer Load	700
(Unbraked) (kg)	
Permitted Towbar	75
Download (kg)	
Permitted Axle Load front/	900/1005
rear (kg)	
Permitted Load (kg)	440
Gross Combination Mass	4030 (M)
GCM (kg)	4040 (A)
Tare (kg)	1340 (M)
-	1360 (A)

205/50 R17

Light Alloy

7Jx17"

Wheels

Material

13.1 (M)

12.9 (A)

6.5 (M)

6.6 (A)

8.9


207


53

Tyre Dimensions

Wheel Dimensions

1507-

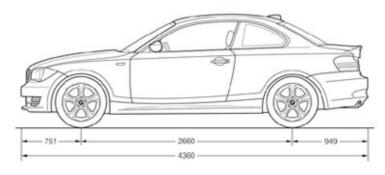

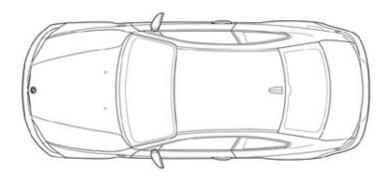

*The published fuel consumption and CO2 emission figures are established according to legislated technical specifications (UNECE Regulation 101/UN Regulation 83 and SANS 20101 standards), which sets out the procedures that are used to measure the CO2 emissions and fuel consumption. The claimed figures are established using specific tests under standardised, carefully controlled conditions and may differ from consumption achieved under real world conditions with the influences of altitude, road surface, geographic conditions, vehicle options, temperature, humidity, tyres size and driving behaviour amongst others.

EU Unladen mass refers to a vehicle with standard equipment, with 90% fuel tank fill, including a driver (68 kg) and luggage (7 kg). Optional extras and accessories will generally increase this figure.

Please contact your preferred authorized BMW dealer or BMW South Africa (Pty) Ltd. for information on vehicles that are available for sale, and the various specifications and options of vehicles that are available.

Trailer loads may not exceed the load stated for un-braked or for braked trailer and the max tow bar load may not exceed the value stated.

Vehicle heights are measured without the aerial. The heights are slightly higher if measured over the aerial. Measurements are stated for vehicles with standard fittings and may vary when optional equipment is fitted.

The technical data stated refers to the current version of the model selected. Due to certain legal regulations in different countries, deviations in the technical data described here can occur.

