Model Specification for 760Li Sedan

250 (A)

4.6 (A)

22.8 (A)

0.30 (A)

- (A)

CO2 Emissions (g/km)

Tank Capacity (I)



<u>Engine</u>		Dimensior
Cylinders/Valves	12/4 (A)	Luggage C
Capacity (cc)	5972 (A)	capacity (I)
Stroke/Bore (mm)	80.0/89.0 (A)	Ground Cle
Rated Power/Rated	400/5250 (A)	Wheelbase
Engine Speed (kW/rpm)		Vehicle Ler
Max Torque/Engine	750/1500 - 5000 (A)	Vehicle Wid
Speed (Nm/rpm)		Vehicle Hei
Combined System		Track, Fron
Torque (Nm)		Track, Rear
Compression Ratio (:1)	10.0 (A)	Rear overha
Engine type	N74B60U0 (A)	Front disk I
		V=ventilate

Performance

5th gear

Top Speed (km/h)

Drag Coefficient (c)

Acceleration 0-100km/h (s)

Standing Start 0-1000m (s)

Acceleration 80-120km/h

with manual transmission in

Dimensions / weights		Weight
Luggage Compartment	500 (A)	Axle load ratio
capacity (I)		DIN) %
Ground Clearance (mm)	152 (A)	Unladen (Din
Wheelbase (mm)	3210 (A)	Gross Vehicle
Vehicle Length (mm)	5219 (A)	(kg)
Vehicle Width (mm)	1902 (A)	Permitted Roo
Vehicle Height (mm)	1487 (A)	Permitted Tra
Track, Front (mm)	1611 (A)	(Braked) (kg)
Track, Rear (mm)	1650 (A)	Permitted Tra
Rear overhang	1143 (A)	(Unbraked) (k
Front disk brakes	V (A)	Permitted Tov
V=ventilated		Download (kg
Rear disk brakes	V (A)	Permitted Axl
V=ventilated		rear (kg)
Turning Circle (m)	12.7 (A)	Permitted Loa
		Gross Combin
		GCM (kg)
		Tare (kg)
Fuel Consumption		Wheels
In Town (I/100km)	19.8 (A)	Tyre Dimensio
Out of Town (I/100km)	8.9 (A)	Tyre Dimensio
Combined (I/100km)	12.9 (A)	
	12.9 (A)	-

	Weight		
)	Axle load ratio (unloaded	48.3 (A)	
	DIN) %		
Ī	Unladen (Din Unladen) (kg)	2175 (A)	
)	Gross Vehicle Mass (GVM)	2750 (A)	
)	(kg)		
	Permitted Roof Load (kg)	100 (A)	C
)	Permitted Trailer Load	2100 (A)	
Ĵ	(Braked) (kg)		
Ĵ	Permitted Trailer Load	750 (A)	
j	(Unbraked) (kg)		
j	Permitted Towbar	100 (A)	
	Download (kg)		
)	Permitted Axle Load front/	1350/1480 (A)	
	rear (kg)		
)	Permitted Load (kg)	575 (A)	
-	Gross Combination Mass	4950 (A)	
	GCM (kg)		
	Tare (kg)	2120 (A)	
	Wheels		
)	Tyre Dimensions	F: 245/45	

Wheel Dimensions

Material

303 (A)


80 (A)


R19Y R:275/40 R19Y (A)

F: 8.5J x 19 R:

9.5J x 19 (A)

Light alloy (A)

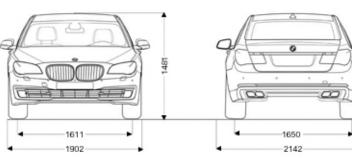

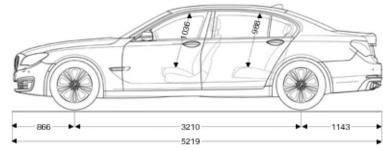

*The published fuel consumption and CO2 emission figures are established according to legislated technical specifications (UNECE Regulation 101/UN Regulation 83 and SANS 20101 standards), which sets out the procedures that are used to measure the CO2 emissions and fuel consumption. The claimed figures are established using specific tests under standardised, carefully controlled conditions and may differ from consumption achieved under real world conditions with the influences of altitude, road surface, geographic conditions, vehicle options, temperature, humidity, tyres size and driving behaviour amongst others.

EU Unladen mass refers to a vehicle with standard equipment, with 90% fuel tank fill, including a driver (68 kg) and luggage (7 kg). Optional extras and accessories will generally increase this figure.

Please contact your preferred authorized BMW dealer or BMW South Africa (Pty) Ltd. for information on vehicles that are available for sale, and the various specifications and options of vehicles that are available.

Trailer loads may not exceed the load stated for un-braked or for braked trailer and the max tow bar load may not exceed the value stated.

Vehicle heights are measured without the aerial. The heights are slightly higher if measured over the aerial. Measurements are stated for vehicles with standard fittings and may vary when optional equipment is fitted.

The technical data stated refers to the current version of the model selected. Due to certain legal regulations in different countries, deviations in the technical data described here can occur.

